



INSTALLATION GUIDE

2009-2014 Ford F-150 Tail Lights

Tool required :

- 8mm socket
- Ratchet



If you are unfamiliar with your vehicle or inexperienced with aftermarket upgrades, professional installation is highly recommended.

Step 1

Open the tailgate, and remove the 8mm bolts holding the stock tail light in place – there should be 2 bolts.



Step 2

Unseat the stock tail light.



Step 3

Disconnect the brake light and turn signal wiring harnesses. Next, remove the reverse light bulb socket.



Step 4

Connect the stock wiring harness to the REX tail light, including reinstalling the reverse light bulb socket.

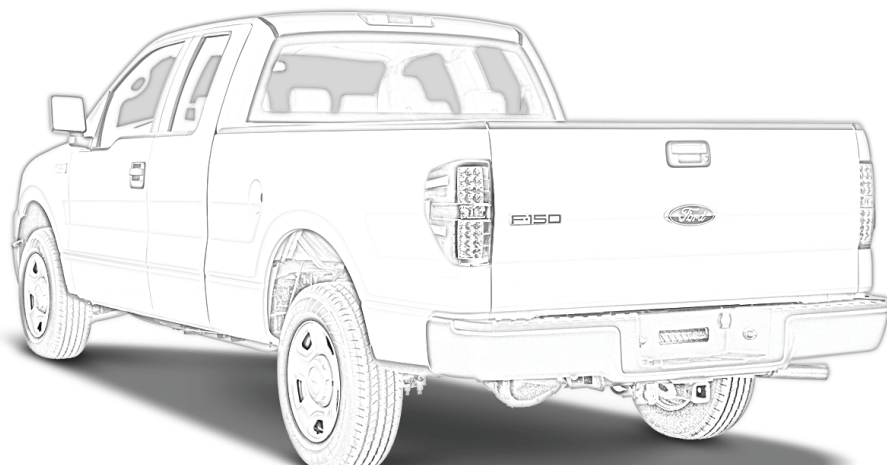


**Step 5**

Seat the REX tail light in your vehicle.

**Step 6**

Secure the REX tail light by reinstalling the 8mm bolts – there should be 2 bolts.

**Step 7**

Your REX tail lights are ready for the road. Enjoy!



Disclaimer

REX Lighting is not liable for damages, injuries, or death while installing the product. The Installation Guide is intended as assistance to reduce installation time. REX Lighting assumes no responsibility for improper installation. If you are unfamiliar with your vehicle or inexperienced with aftermarket upgrades, please seek professional installation.