



INSTALLATION GUIDE

2007-2013


TOYOTA FJ CRUISER
TAIL LIGHTS

Tool required :

- Deep Socket Wrench/Ratchet



Product damage resulting from improper installation is NOT covered by warranty. If you are inexperienced with aftermarket upgrades, professional installation is recommended.

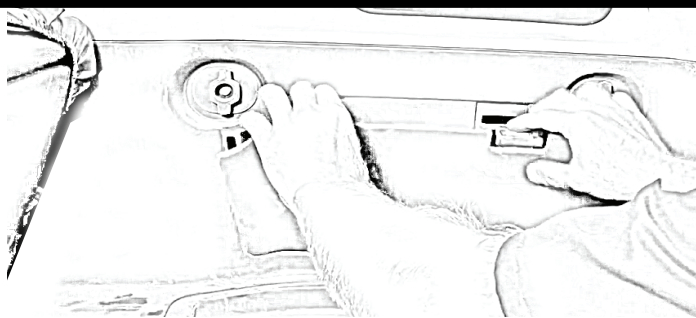


Step 1

Undo and release 3 plastic panels.




Step 2

Remove the 3 10mm nuts that hold the tail light in place from the inside of the vehicle. There is two near the hatch and one farther away.

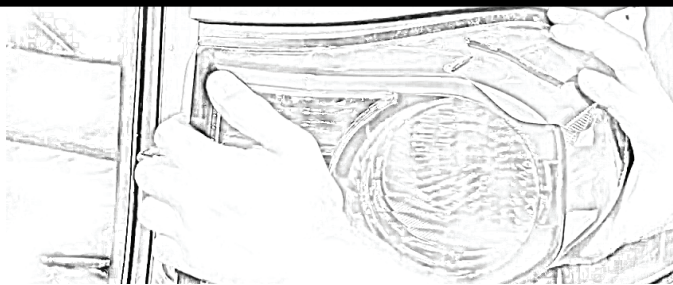

Step 3

Using your hands, pry away from the vehicle to release the old tail light.

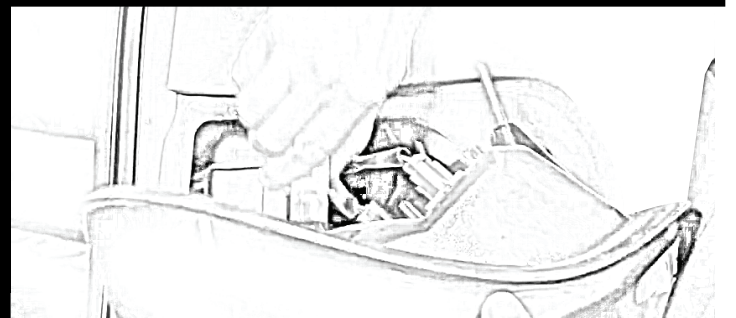


Step 4

Undo the wiring harnesses.

Step 5

Installation of LED tail light is opposite of removal.

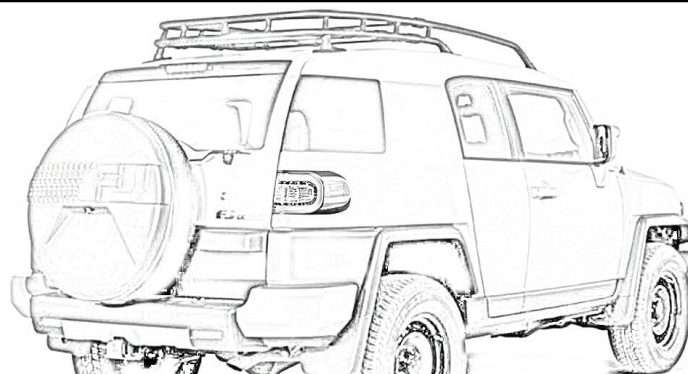



Disclaimer

REX Lighting is not liable for damages, injuries, or death while installing the product. The Installation Guide is intended as assistance to reduce installation time. REX Lighting assumes no responsibility for improper installation. If you are unfamiliar with your vehicle or inexperienced with aftermarket upgrades, please seek professional installation.